

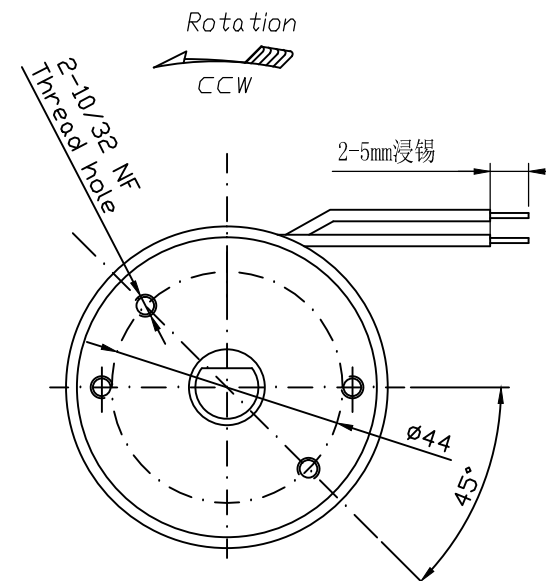


Rohs Compliance

REV	DESCRIPTION	DATE	BY

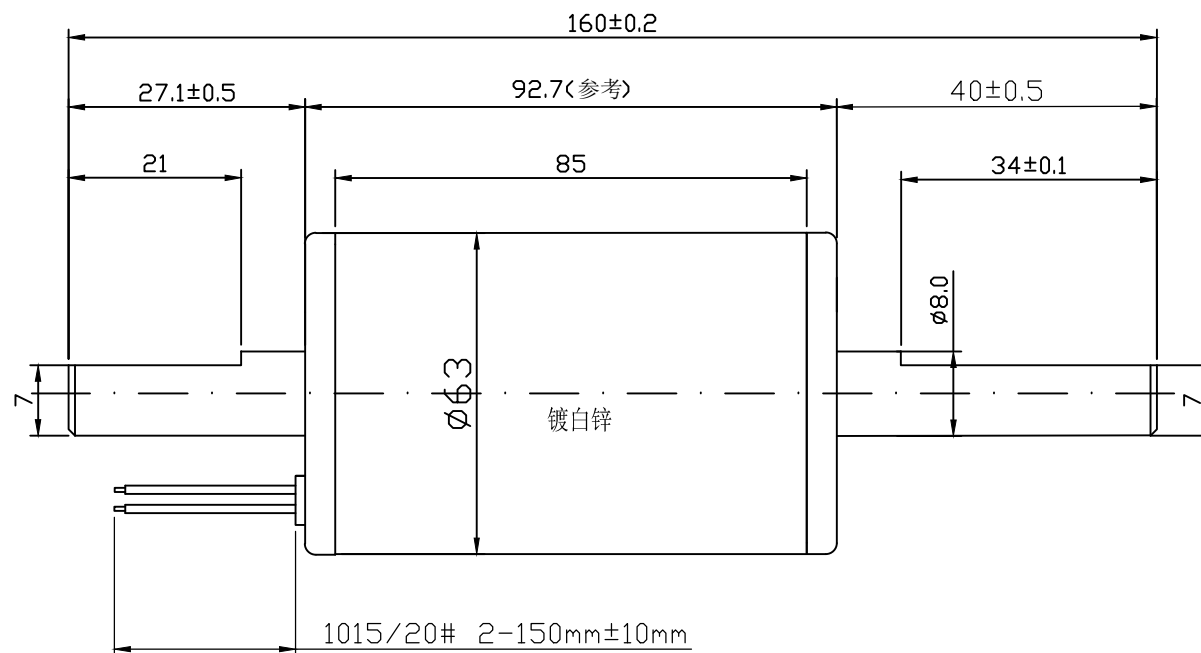

CIRCUIT DIAGRAM

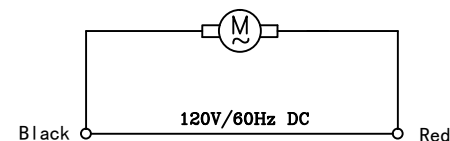

Label content:

OD-4435D120
120V/60Hz
MADE IN CHINA

Notes:

1. Voltage with Frequency (电压和频率): 120V/60Hz DC

2. Rotation (转向): CCW

3.

No-load Speed (空载转速): $6600 \pm 10\%$ RPM

On load Speed (负载转速): $6000 \pm 10\%$ RPM

4. Insulation Grade (绝缘等级): Class B

5. Withstand Voltage (耐压): 1500V/10Ma/1Sec

GENERAL TOLERANCES ISO 2768-m											
Permissible deviations for linear dimensions											
Permissible deviations for basic size range											
	>0.5 ...3	>3 ...6	>6 ...30	>30 ...120	>120 ...400	>400 ...1000	>1000 ...2000	>2000 ...4000			
m	± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2			
Permissible deviations for angular dimensions						Permissible deviations for broken edges (external radii chamfer heights)					
Permissible deviations for ranges of lengths in millimeters of the shorter side of the angle concerned						Permissible deviations for basic size range					
	>10 ...50	>50 ...120	>120 ...400	>400		>0.5 ...3	>3 ...6	>6 ...12			
m	$\pm 1^\circ$	$\pm 0^\circ 30'$	$\pm 0^\circ 20'$	$\pm 0^\circ 10'$	$\pm 0^\circ 5'$	± 0.2	± 0.5	± 1			

DWN. BY Edward	CHK. BY	APP. BY
Date (yyymmdd) 2017-03-06	Date (yyymmdd)	Date (yyymmdd)
MATERIAL:		
FINISH:		
General Tolerance ISO 2768-1 Class m (Unless specified)		TITLE
ALL DIMENSIONS ARE IN MILLIMETRES		OD-4435D120
TEAMWORK GLOBAL GROUP LIMITED		DWG NO. 4435D120
		SHEET 1 OF 1